


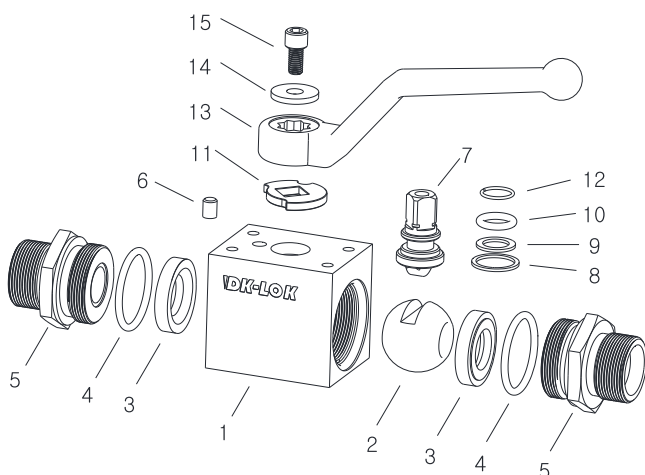

Features

- Pressure Rating up to 500 bar (7,250 psi)
- Positive stop with robust stop pin
- Various end ports including DIN Standard port

Features

- Hydraulic fluids
- Compressed Air
- Fuel oil system

Material of Construction

Component	Valve Body Material	
	Stainless Steel	Carbon Steel
	Grade/ASTM, JIS Specification	
1. Body	SS316/A276	S45C
2. Ball	SS316/A276	SS316/A276
3. Seat	POM	
4. o-ring	FKM	NBR
5. Connector	SS316/A276	S45C
6. Pin	SS316	
7. Stem	SS316/A276	S45C
8. Bearing	POM	
9. Stem ring	POM	
10. Stem o-ring	FKM	
11. Stopper	SS304	
12. Snap ring	SS304	
13. Handle	SS316	S45C
14. Washer	SS304	
15. Screw	SS304	SS41

- Wetted parts and lubricants listed in [blue](#).
- Fluorinated-based lubricant

Factory Testing

Every valve is tested with nitrogen gas @ 1000 psig(68bar) for leakage at the seat to a maximum allowable leak rate of 0.1 SCCM. The stem packing is tested with nitrogen gas@1000 psig for no detectable leakages.

Optional Seat Material




Rating based on valve with standard POM seat.

Seat	Temperature Rating ° C (°F)
POM, PEEK	-30 to 100 (-22 to 212)
PTFE	-54 to 65 (-65 to 149)

Optional O-ring Materials

FKM O-Rings are standard. Add the designator to the ordering number for valve with optional O-ring material.

O-ring Materials	Designator	Temperature Rating ° C (°F)
FKM	Nil	-23 ~ 190 (-10 ~375)
NBR	BN	-23 ~ 121 (-10 ~ 250)
EPDM	EP	-45 ~ 148 (-50 ~ 300)
FFKM	KZ	-30 ~ 210 (-22 ~ 410)

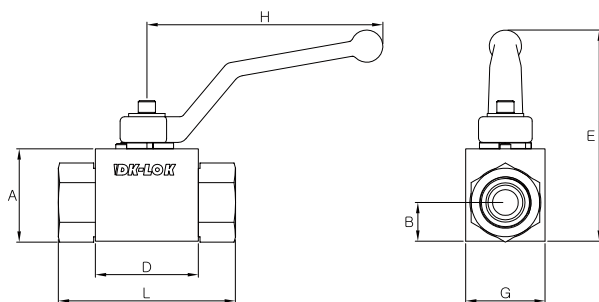

Ordering Information and Table of Dimensions

Basic Ordering Number		End Connections	DN O	PN bar	Dimensions, mm							
					A	B	E	G	D	L	H	
V87A-	F2N	1/8 in. Female NPT	4	500	35	14.5	96.5	30	42.0	71.0	110	
	F4N	1/4 in. Female NPT	6									
	F2G	1/8 in. Female PF	4									
	F4G	1/4 in. Female PF	6									
	N6L	6mm	6							76.0		
	N8L	8mm										
	N10L	10mm										
	N8S	8mm										4
N10S	10mm	6										
N12S	12mm	8										
V87B-	F6N	3/8 in. Female NPT	10	500	40	18.5	101.5	35	44.4		73.0	110
	F6G	3/8 in. Female PF										
	N12L	12mm								79.5		
	N14S	14mm								82.5		
V87C-	F8N	1/2 in. Female NPT	13	500	43	19.5	104.5	37	48.4	83.0	110	
	F8G	1/2 in. Female PF										
	N15L	15mm								87.0		
	N18L	18mm								89.0		
	N16S	16mm								93.0		
	N20S	20mm										
V87D-	F12N	3/4 in. Female NPT	20	400	55	23.5	130.0	45	62.5	95.0	175	
	F12G	3/4 in. Female PF								110.0		
	N22L	22mm								111.0		
	N25S	25mm										
V87E-	F16N	1 in. Female NPT	20	350	65	29.5	140.0	55	66.5	112.0	175	
	F16G	1 in. Female PF										
	N28L	28mm	117.0									
	N35L	35mm	119.0									
	N42L	42mm										
	N30S	30mm	121.0									
	N38S	38mm	131.0									
			25									

Ordering Information

Select valve basic ordering number, applicable options and body material.

V87A - F4N -

V87B - N12L -

V87D - N30S -

BN-

EP-

KZ-

PE

S

L

O-ring Material Designator	Seat Material Designator	Valve Body Material Designator
Nil : FKM BN : NBR EP : EPDM KZ : FFKM	Nil : POM PE : PTFE PK : PEEK	S : 316 stainless steel L : 316L stainless steel C : Carbon steel

Safe Valve Selection

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.